


5 REFERENCES FOR LP GAS STORAGE AND HANDLING ACTIVITIES

- Dangerous Goods Safety (Storage and Handling of Non-explosives) Regulations 2007
- Static storage – see AS 1596 *The storage and handling of LP Gas*
- Exchange LP Gas cylinder facilities – see Appendix G of AS 1596
- Mobile use of oxy-fuel systems – see AS 4839 *The safe use of portable and mobile oxy-fuel gas systems for welding, cutting, heating and allied processes*
- Decanting – LP Gas suppliers have standard procedure; also see Appendix J of AS 1596

[www.dmp.wa.gov.au/
ResourceSafety](http://www.dmp.wa.gov.au/ResourceSafety)

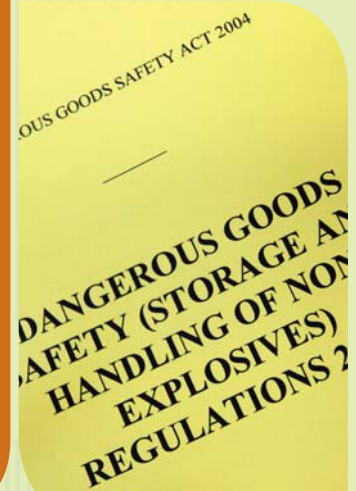

6 REFERENCES FOR LP GAS TRANSPORT ACTIVITIES

- Transport of LP Gas in quantities exceeding 250 litres is described as **placard load transport** and is regulated under the Dangerous Goods Safety (Road and Rail Transport of Non-explosives) Regulations 2007 (www.slp.wa.gov.au)
- Technical requirements for transport are contained in the *Australian Dangerous Goods Code, 7th edition* (www.ntc.gov.au)
- Responsibilities are defined for:
 - Consignor
 - Driver
 - Prime contractor
 - Loader
 - Vehicle owner

